


FlareFit Seals



COPPER FITTINGS

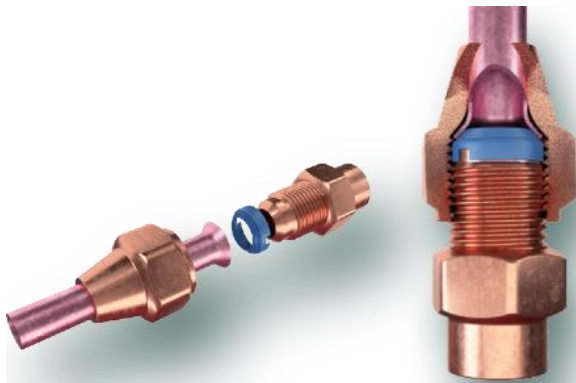


Characterstics & Features

- 45° Copper Stamping with Loctite coating
- Locking tabs clip seal securely on fitting
- Conical rings for multiple points of contact
- Made for all common 45° fittings
- Rated for -40°F to 300°F (-40°C to 149°C)

Applicable Standards

- Flare seals prevent leaks caused by galling, vibration, pulsation, and extreme temperature changes.
- They ensure leak-free connections, even in the harshest environments.

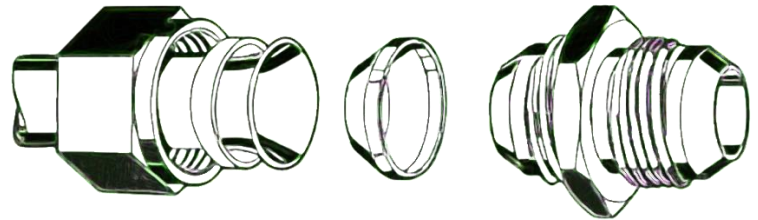

Product Codes and Dimensions

Code	Description	Quantity	Dimensions(Inch)
CFFC(-4)	(10) 1/4" Seal Kit	100PCS	8x5x3
CFFC(-6)	(10) 3/8" Seal Kit	100PCS	8x5x3
CFFC(-8)	(10) 1/2" Seal Kit	100PCS	8x5x3
CFFC(-10)	(10) 5/8" Seal Kit	100PCS	8x5x3
CFFC(-12)	(10) 3/4" Seal Kit	100PCS	8x5x3
CFFC(-16)	(10) 1" Seal Kit	100PCS	8x5x3



Limited Warranty

